



KRISTAL (3.1.x)

2007. 4. 11

1

2

3

4

XML

5

6


7

(4.0)

8

(1/4)


- 가
 - 가
 - USER_WEIGHTING_SECTIONS = "TITLE"
 - 3 가

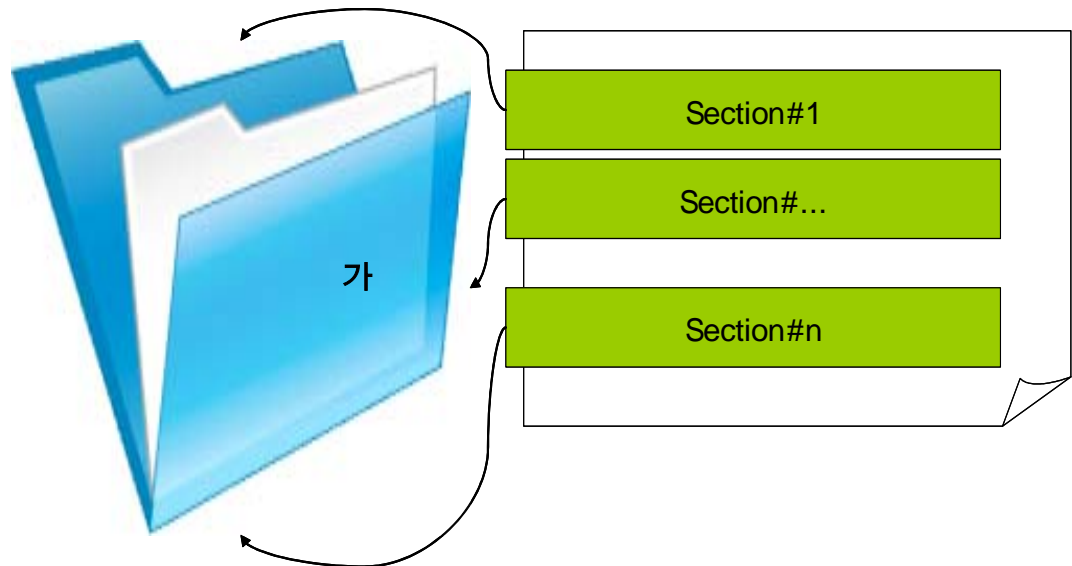

(2/4)

• VectorAnd

- p_in.method = VECTOR_AND_MODEL;
- p_in.query = (TIK :)
-

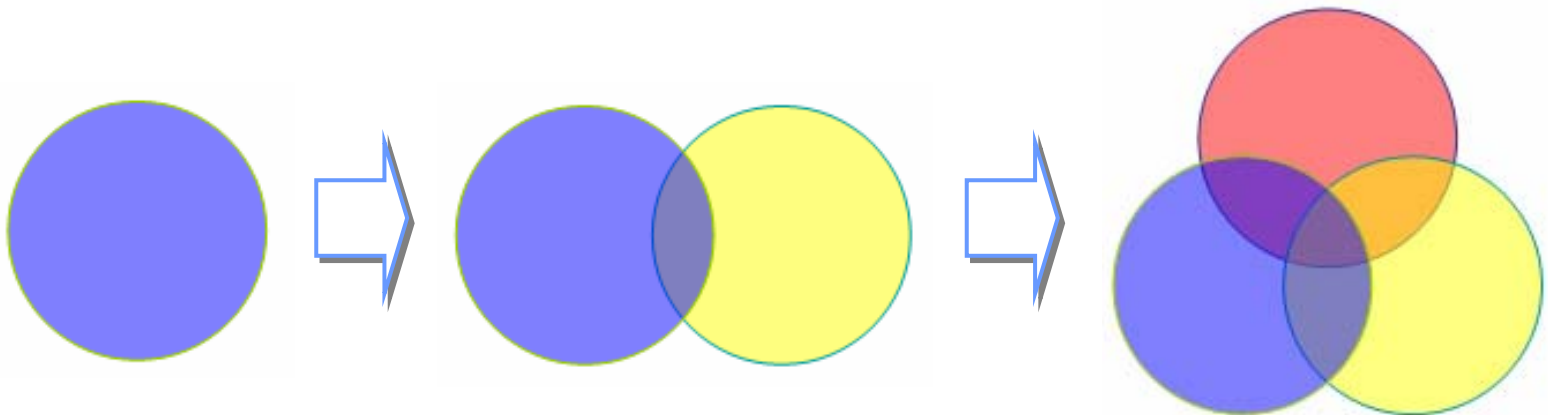

(3/4)

• LIKE



- ' , ' ,
- DB
-
-
-
-)

가

- TIK : %
- TIK : %
- TIK : %
- TIK : % % %



(4/4)

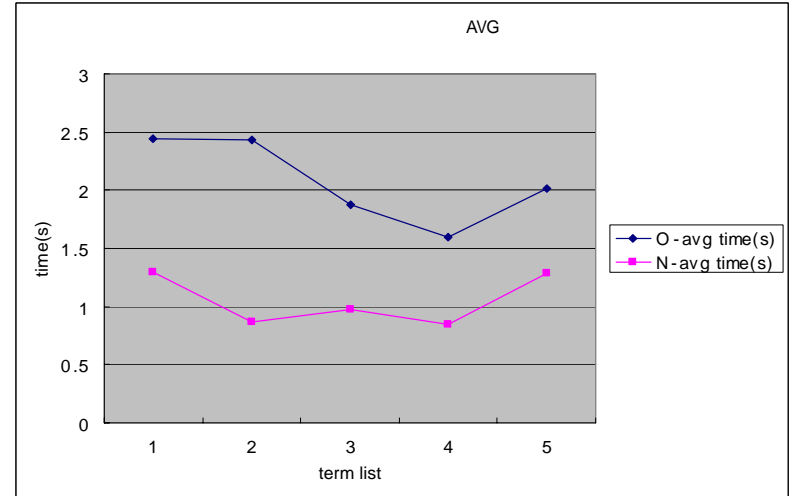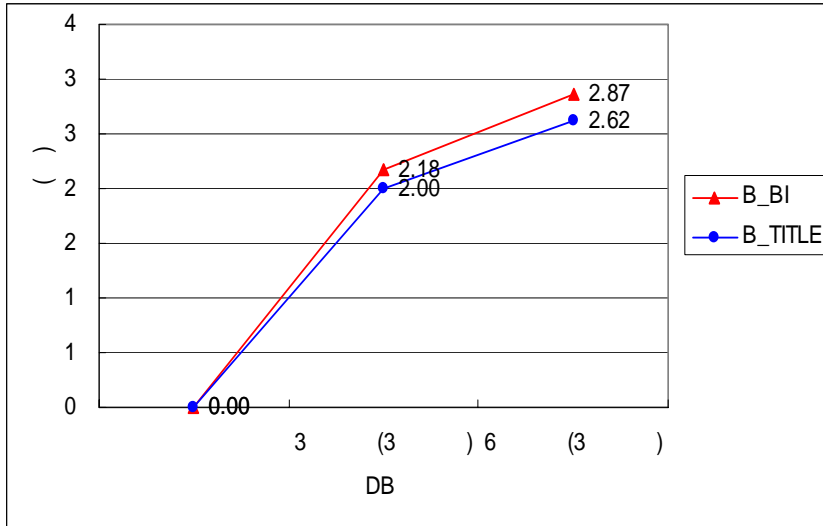

(1/2)

-

-

/

-

가

	2.x.x	3.1.x	
	206,138	569,023	+ (7,823) (561,200)
	1,031,829	1,039,950	

(2/2)

- - - 가 가
 - 가 가
 - - 8,000

	- -
	- & - - -
	- -

•

(1/4)


●

—


- SYS.CDATE :
- SYS.UDATE :

—

가

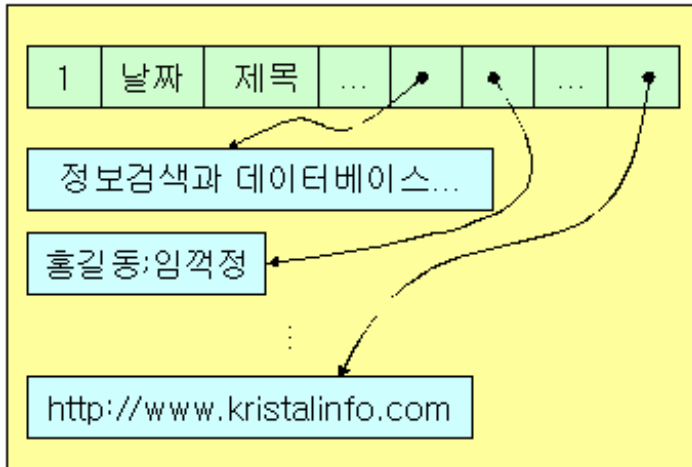


2.x.x

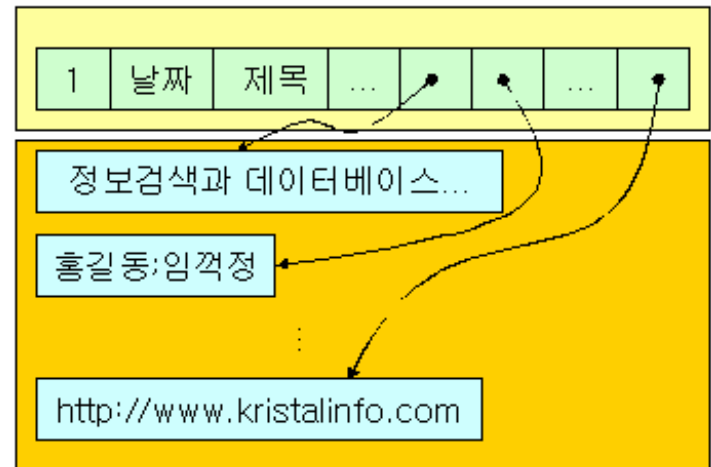


3.1.x


(2/4)

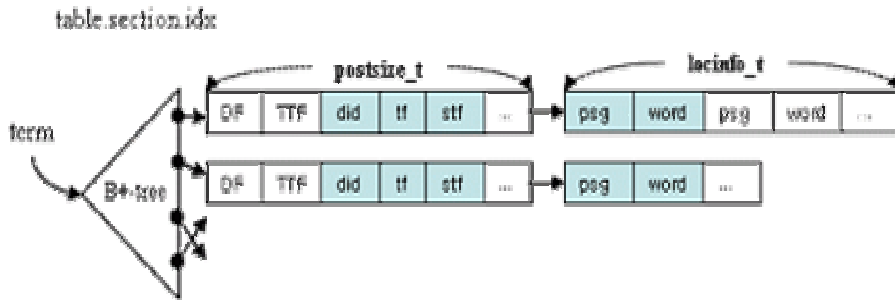


2.x.x

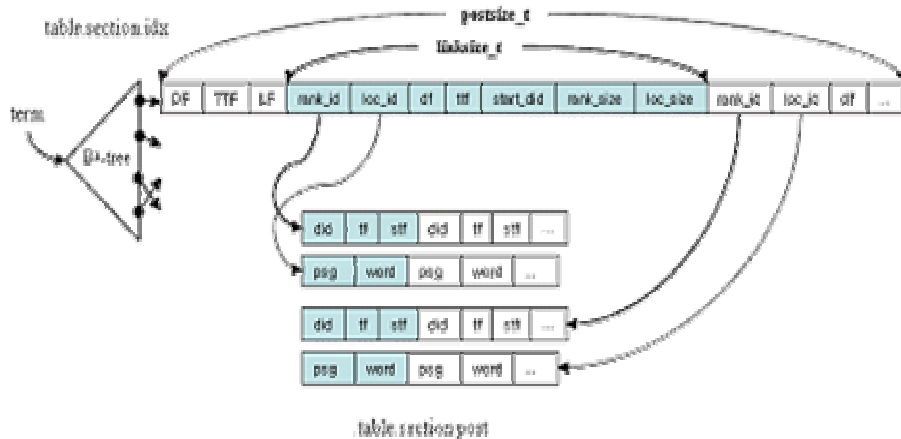


3.1.x

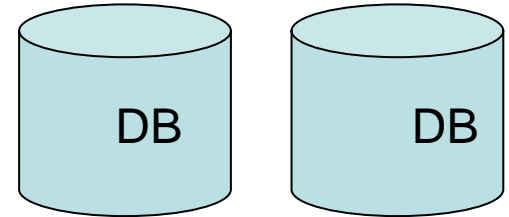

2.0.x

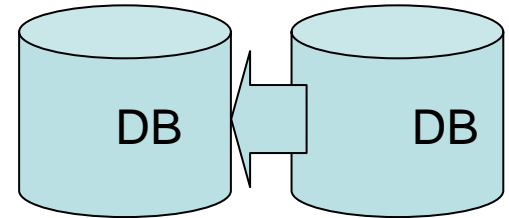

2.1.x



3.1.x


(3/4)

• KRISTAL

	2.0.x	2.1.x	3.1.x
	DB DB	DB	
DB	DB DB	DB DB	segmentation()
	DB	DB - DB	DB
	(flag) - DB	(flag) - DB	
	/	/	
	-	-	
	- / - /	- / - /	

(4/4)

• KRISTAL

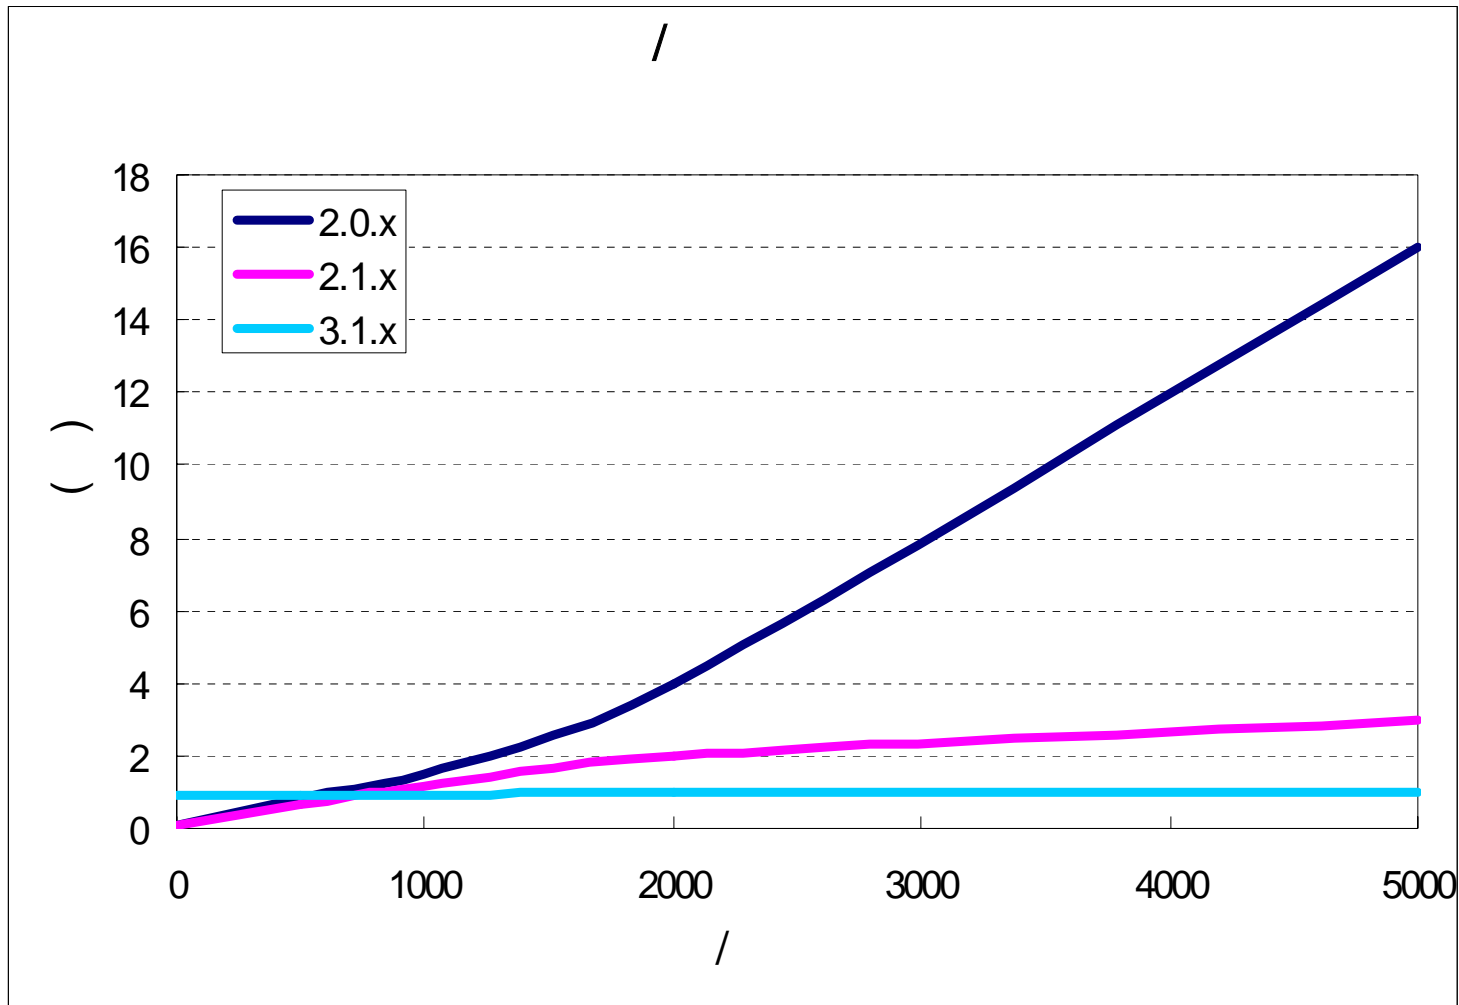

XML

- - -
 -
 - -
- -
- -
 - /
 - / 가 가

가

가

가


(1/2)

- - init_db_env
 - init_db_log
- 가/
 - create_table, drop_table
- 가/ /
 - add_{basic|vital|union}_section
 - drop_section
 - resize_section
- 가
 - build_index_table/clear_index_table
 - build_index_section/clear_index_section

(2/2)

- (kristal_dbadmin)
 - -) KINT
 - - 60~70%

(1/2)

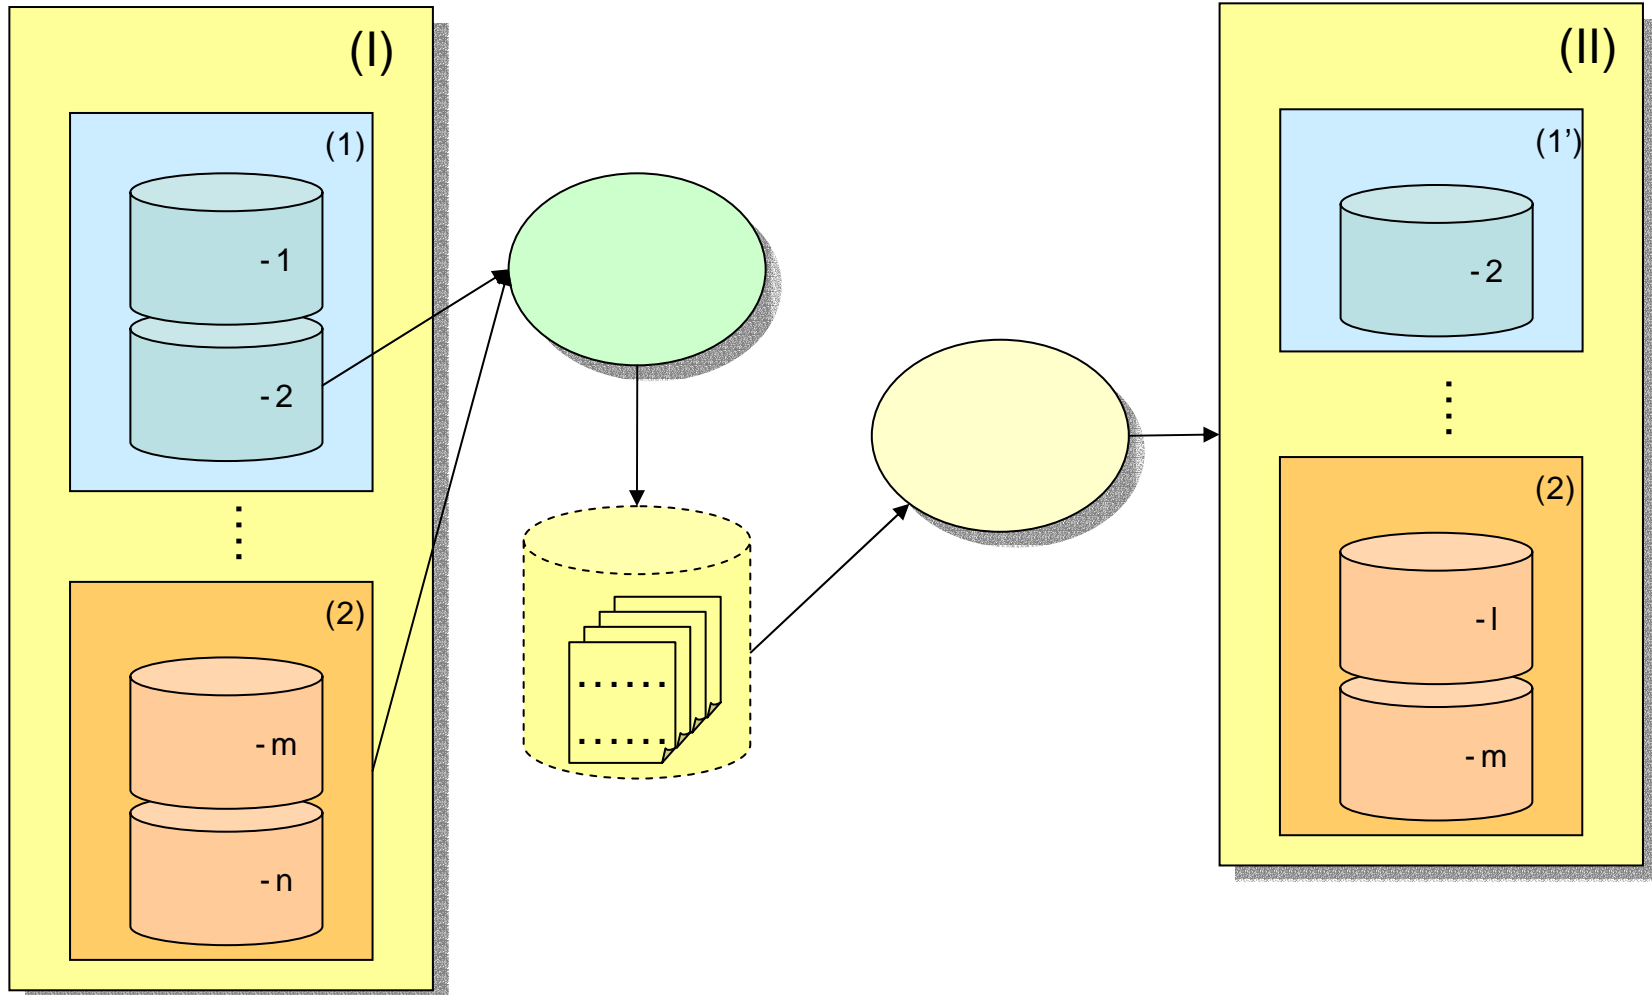

(2/2)

- -
 -
 - (/) 가
 - / 가
 - 가 DB 가

- - xml
 - 10
 - xml 가
 - kristal_dump_txt 가 →

- 2.x.x 3.1.x
-
- (kristal_export) “ ”
- “ ”
- (kristal_dbadmin)
- 가
-
- kristal.jar 3.1.x
-
- 3.1.8

(4.0)

- - (derived section)
 - DB
 -
- -
 - IMQL /
- - N-gram 가
 -
 -
- -
 -

KRISTAL

<http://www.kristalinfo.com>

■